




Features

- High power handling up to 150W.
- Wide band operation.
- High isolation within operational band.
- Low Insertion Loss.
- Customization can be made based on the application requirement of the customer.
- Female Contact is gold plated beryllium brass.
- Finishing is painted to protect from corrosion.
- Also available for different frequency ranges.

Specifications

Electrical Characteristics	
Frequency Range	130 - 150 MHz
Type	1:4 Way power divider
Insertion Loss	≤ 1 dB (Excluding theoretical loss)
Isolation	≥ 18 dB
Return Loss	≥ 17 dB
Power Handling	15W CW
Impedance	50 Ohms
Input Connector	N Female
Output Connector	N Female
Operating Temperature	-30 to + 70 °C
Dimensions	177 x 70 x 25 mm approx.

Drawings

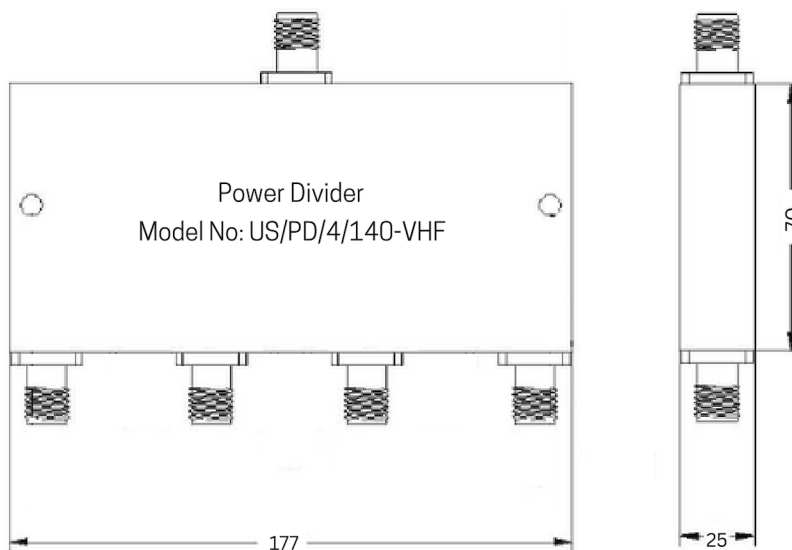

Applications

- Wireless Infrastructure
- Military & Aerospace
- Test Instrumentation
- Radar Systems
- 5G Wireless Communications
- Microwave Radio Systems
- TR Modules
- Research & Development
- Cellular Base Stations

