




Specifications

Electrical Characteristics	
Center Frequency (Fo)	720 MHz
Pass Band Bandwidth	10 MHz (710 to 730 MHz)
Pass Band Insertion Loss	3 dB @ 720 MHz
Pass Band Return Loss	≥ 18 dB
Pass Band Flatness	1.0 dB max.
Stop Band rejection	≥ 65 dB @ 650 MHz ≥ 60 dB @ 790 MHz
Input / Output Impedance	50 Ohms
Power Handling	1 Watts
Input / Output Connectors	SMA-Female
Temperature Range	0 - 50 ° C
Dimensions	150 x 30 x 78 mm approx.

Mechanical Drawing

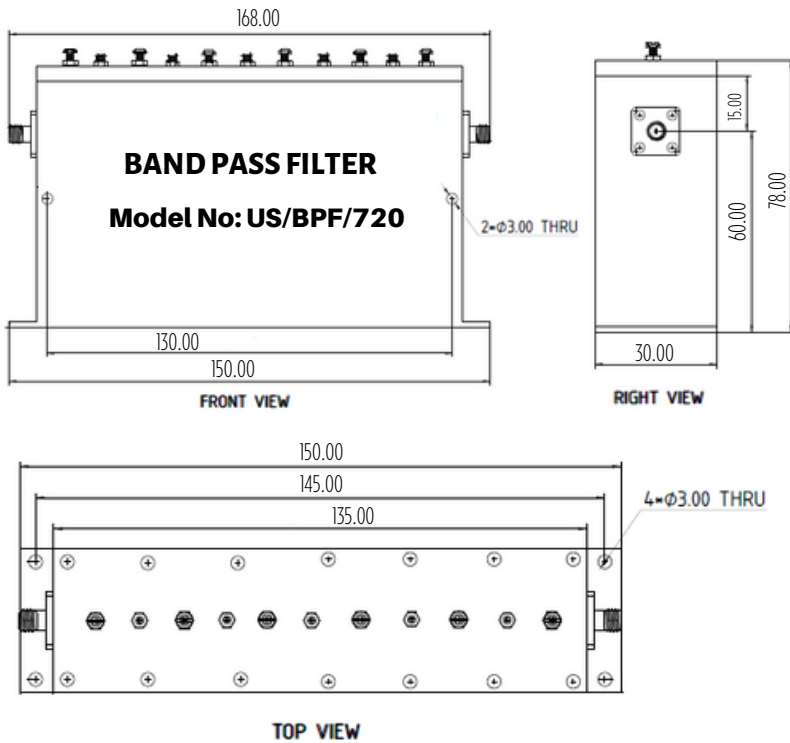

Test Results

