





### Specifications

Electrical Characteristics	
Pass Band Frequency	2200 - 2300 MHz
Center Frequency (Fo)	2250 MHz
Insertion Loss at Center Frequency (Fo)	3.5 dB max.
Input / Output ports Return loss	≥ 18 dB
Stop Band Rejection	≥ 35 dB @ 2160 MHz and ≥ 35 dB @ 2340 MHz
Input / Output ports Impedance	50 Ohms
Power Handling	1 Watts max.
Input / Output Connectors	SMA-Female
Temperature Range	0 - 50 °C
Dimensions (L X W X H)	110 x 48 x 31 mm approx.


### Mechanical Drawing

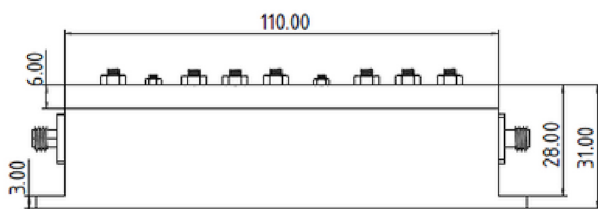


FRONT VIEW

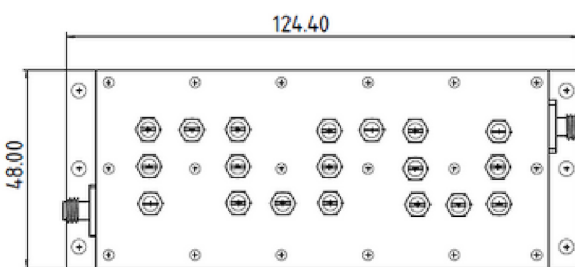

TOP VIEW


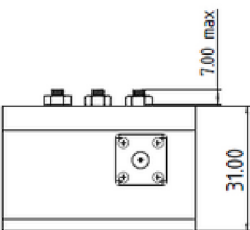


RIGHT VIEW



LEFT VIEW

### Test Results

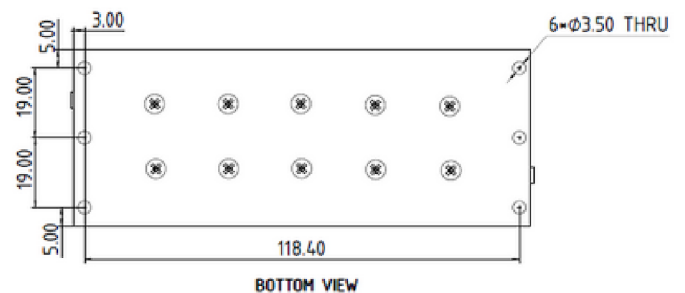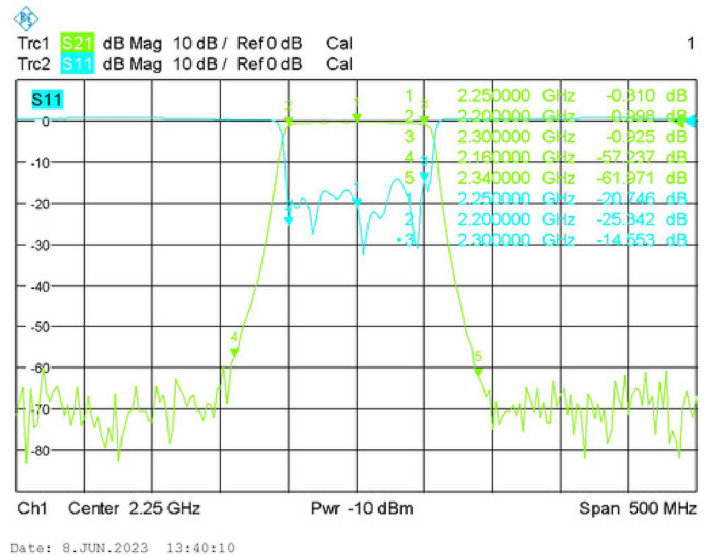

BOTTOM VIEW

